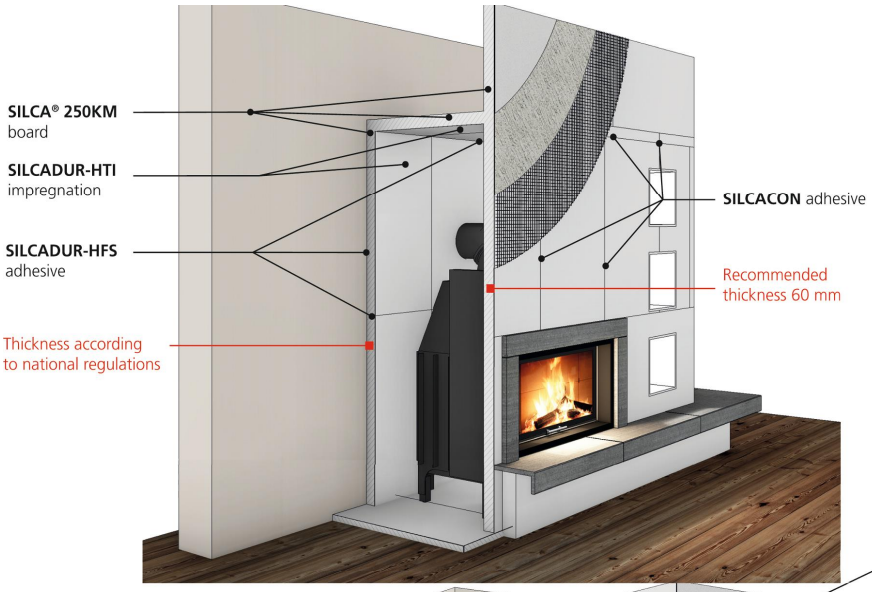
SILCA® 250KM
board
SILCADUR-HTI
impregnation
SILCADUR-HFS
adhesive
Thickness according
to national regulations
SILCACON adhesive
Recommended
thickness 60 mm

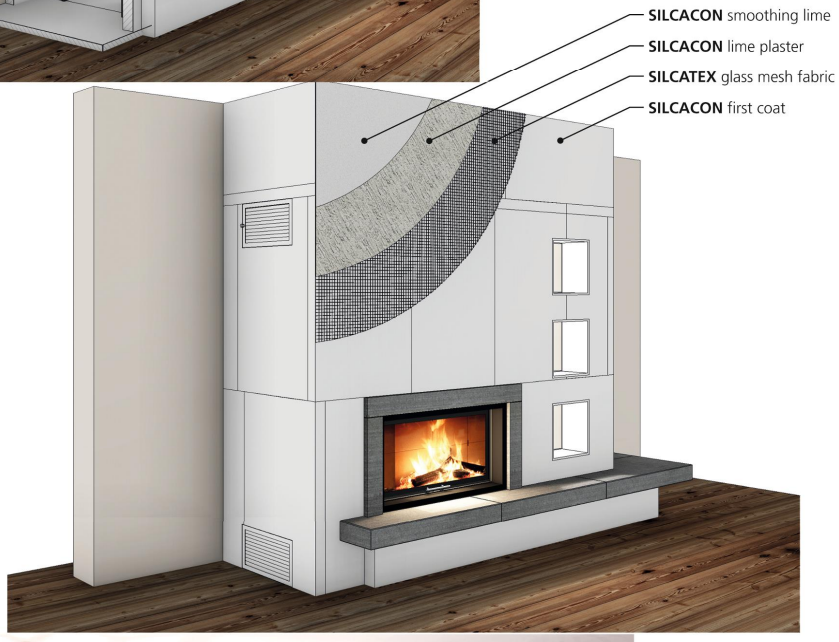
SILCACON smoothing lime
SILCACON lime plaster
SILCATEX glass mesh fabric
SILCACON first coat